


MECHANISMS

Mechanisms specification															kW
Hoisting		150LCC50	m/min	0-41,4	0-49,7	0-62,1	0-82,	0-99,4	0-20,7	0-24,8	0-31,1	0-41,4	0-49,7	770m >770m ※	110
			t	10,0	7,5	5,0	2,5	1,25	20,0	15,0	10,0	5,0	2,50		
		150LCC50	m/min	0-46		0-82		0-92	0-23		0-41		0-46	900m >900m ※	110
			t	10		5		2,5	20		10		5		
Luffing		85BWZA55	min	≤ 3,5											63
Slewing		RCV185	r/min	0-0,7										Stall Torque 3x185 Nm	
		37RVF	r/min												
Travelling		RT643	m/min	0-16-32											6x2,6/5,2
		42TVF	m/min	0-32											6x5,2

To be supplied according to client* specific requirements
Subject to modification



JIB

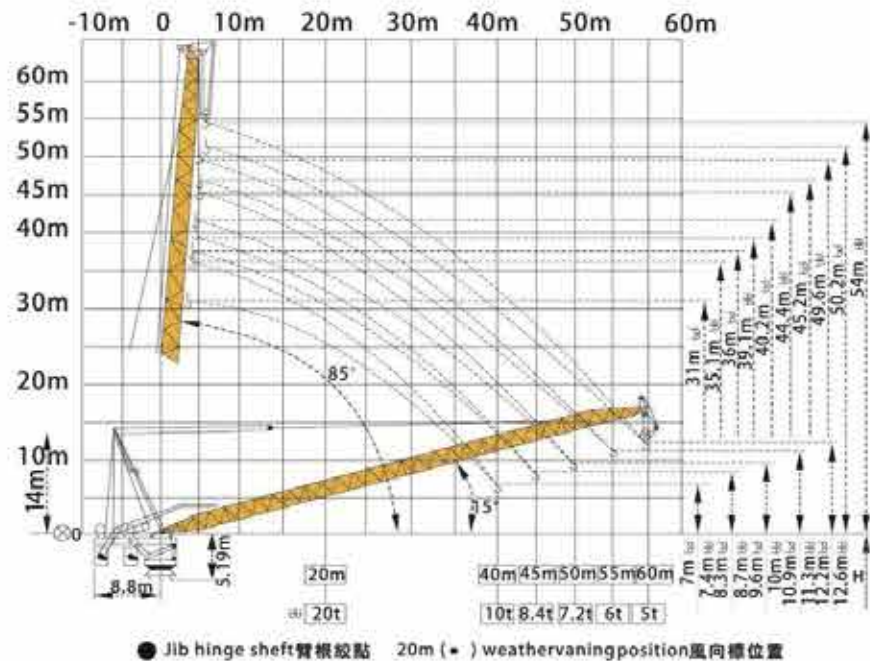


LOAD DIAGRAMS

60m			5.5	20	23	25	27	30	32	35	35.6	36.3	37	40	42	45	47	50	52	55	57	60	m	
				10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	9.80	9.00	8.40	7.70	7.20	6.60	6.20	5.70	5.40	5.00	t	
				20.00	17.50	16.00	14.70	12.90	11.80	11.80	10.30	10.00	9.40	8.60	8.00	7.30	6.80	6.20	5.80	5.30	5.00	4.60	t	
55m			5.0	20.4	23	25	27	30	32	35	36.2	37	40	42	45	47	50	52	55				m	
				10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	9.10	8.60	7.90	7.50	6.90	6.50	6.00				t	
				20.00	18.00	16.60	15.30	13.40	12.20	10.60	10.00	10.00	8.70	8.20	7.50	7.10	6.50	6.10	5.60				t	
50m			5.0	20.8	23	25	27	30	32	35	36.7	37.5	40	42	45	47	50						m	
				10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	9.30	5.80	8.20	7.80	7.20						t	
				20.00	18.30	17.00	15.60	13.80	12.60	10.00	10.00	10.00	8.90	8.40	7.80	7.40	6.80						t	
45m			4.5	21.2	23	25	27	30	32	35	36.7	37.5	40	42	45								m	
				10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	9.50	9.00	8.40								t	
				20.00	18.30	17.30	16.00	14.10	12.90	11.20	10.00	10.00	9.10	8.60	8.00								t	
40m			4.0	21.2	23	25	27	30	32	35	37	40											m	
				10.00																				t
				20.00	18.90	17.50	16.20	14.40	13.40	12.00	10.90	10.00											t	

TOWER

TOWER

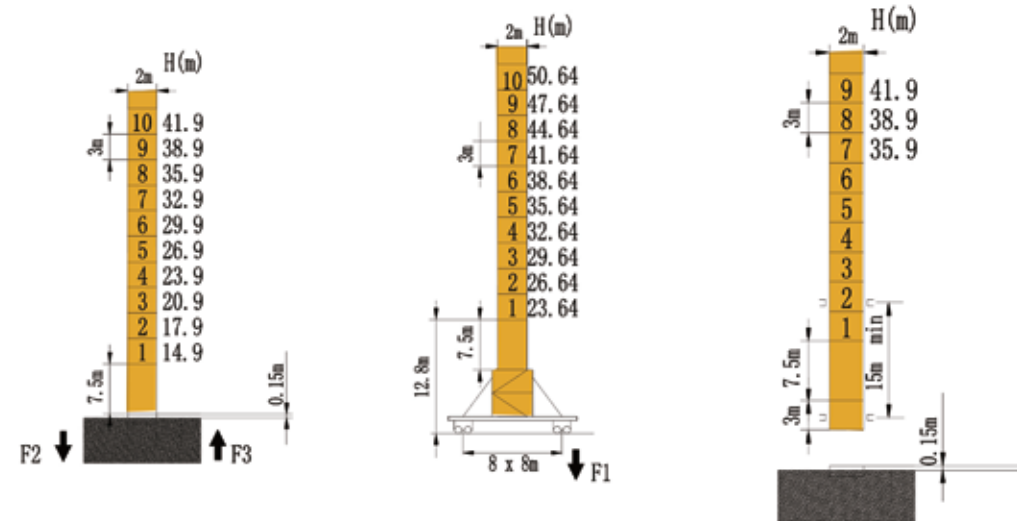

F2	●	■
F3	●	■

F1	●	■
F2	●	■
F3	●	■

ANCHORAGES

ANCHORAGES

